

XP-Q301F

Thermal Barcode Printer

Xprinter®

- Various label width, can be 20mm-83mm
- Label paper auto detection
- Temperature control function
- Modularity design and meet with various applications
- Support QR CODE Printing




Coffee Shop



Shopping




Mart

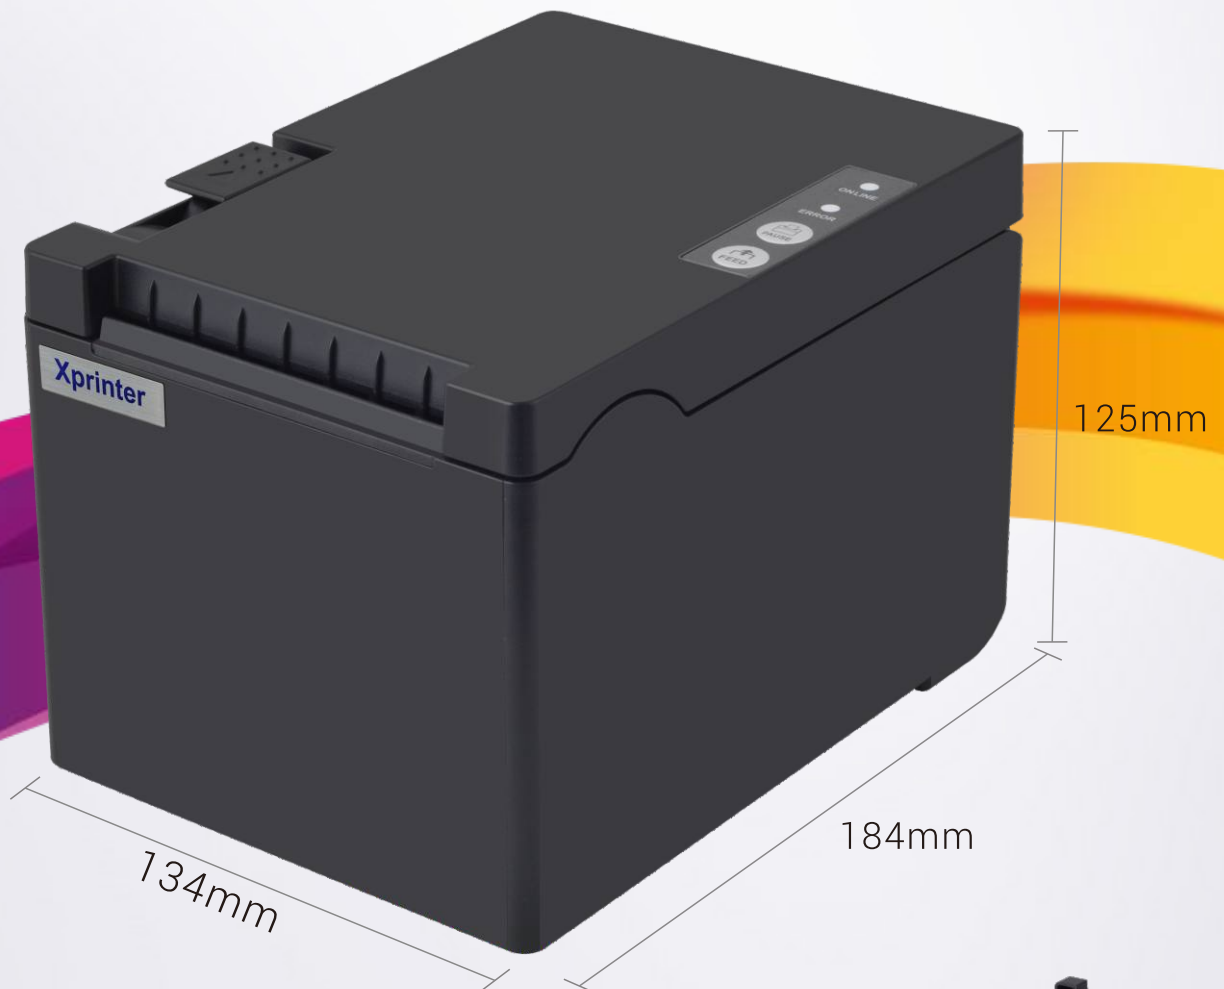

XP-Q301F

Thermal Barcode Printer



Model		XP-Q301F	
Print mode	Label print mode	Receipt print mode	
Resolution	203 DPI		
Printing method	Direct Thermal		
Max.print speed	127 mm/s Max.	220 mm/s Max.	
Max.print width	80 mm		
Media			
Media type	Thermal roll paper, thermal adhesive paper		
Media width	83 ± 0.5mm		
Media thickness	0.12 ~ 0.2 mm	0.06 ~ 0.08 mm	
Media roll diameter	Max.82 mm		
Supply method	Easy Paper Loading		
Performance Features			
Ram	8M		
Flash	8M		
Interfaces	USB+Serial+Lan		
Sensors	Print head temperature sensor/ Paper end/ Cover open / Gap		
Fonts/Graphics/Symbologies			
Character sizes	Commonly used in single-byte fonts; FONT 0 to FONT 8, K, TST24.BF2,TSS24.BF2		
1D barcode	CODE128 / EAN128 / ITF / CODE39 / CODE39C / CODE39S / CODE93 / EAN13 / EAN13+2 / EAN13+5 / EAN8 / EAN8+2 / EAN8+5 / CODABAR / POSTNET / UPC-A / UPCA+2 / UPCA+5 / UPCE / UPCE+2 / UPCE+5 / MSI / MSIC / PLESSEY / ITF14 / EAN14		
2D bar code	PDF417、QRCODE、DataMatrix		
Emulaion	TSPL	ESC/POS	
Physical Features			
Dimension	184×134×125mm (D×W×H)		
Weight	1.12 kg		
Reliability			
Print head life	50 km		
Software			
Driver	Windows		
SDK	iOS/ Android/ Windows		
Power supply			
Input	DC 24V/2.5A		
Environmental Conditions			
Operation	5~45 °C Humidity:RH 10 ~ 80%		
Storage environment	-40 ~ 55 °C Humidity:93% RH		



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 3895 852
Http://www.xprintertech.com
Email: overseas@xprinter.net

