



# ARTEMIS TPV




## SPECIFICATIONS

SYSTEM	
Processor	Intel Celeron J1900 Quad-Core, Up to 2.42Ghz Intel Celeron J3455 Quad-Core, Up to 2.30 GHz Intel Celeron J4125 Quad-Core, Up to 2.70 GHz Intel Core i3/i5 3rd, 4th, 5th, 6th, 7th, 8th High Performance CPU
Memory	2GB Standard, DDR3L or DDR4, up to 8GB/16GB/32GB
Storage	mSata or M.2 32GB standard, up to 512GB
OS	Windows 7, 10, 11, POSReady7
DISPLAY	
Type	15 inch LED Backlight Display
Resolution	1024*768
Aspect Ratio	4:3
Brightness	250 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	6* External USB2.0
LAN	1*RJ45
Display	1*VGA or 1*VGA & 1*HDMI
Serial	2*COM(RS232)
Audio	1*Line Out, 1*Mic In
Cash Drawer	1*RJ11(Optional)
Power DC-IN	Input AC 100-240V/50-60hz, Output DC 12V/5A
PHYSICAL&ENVIRONMENTAL	
Operating Temperature	Operating 0-50°
Storage Temperature	Storage-20°-60°
Cooling	Fanless/With CPU Fan
Dimensions	(W×H×D) 360x380x210 MM
Packing Dimensions	(W×H×D) 430x450x290 MM
Net Weight	5.10KG(Single Display)
Packing Weight	7.50KG
Color	Black
OPTIONS & PERIPHERALS	
Additional Hard Disk	2.5 inch sata3.0 SSD or 500GB, 1TB HDD
2nd Display	12.1/15 inch (Touch on 2nd display Option), (9.7 inch Pending)
VFD	VFD, 20 Columns x 2 Lines(Pending)
MSR	ISO 3 Tracks Reading
Wifi	IEEE 802.11 a/b/g/n/ac, 2.4Ghz (5.0Ghz option)
Bluetooth	Bluetooth 4.0 protocol
Speaker	1*4Ω*3W Speaker
Wall Mount	VESA 75*75mm (Available for Single Display Only)

## DIMENSIONES



## DESTACANDO



Intel Celeron & Core Series CPU



15inch 1024\*768



Honeycomb design style vents



Light Blue Power Indicator



VESA Standard 75\*75



Foldable Stand



# HADES TPV




## SPECIFICATIONS

SYSTEM	
Processor	Intel Core i5 4th Generation Processor
Memory	4GB Standard, DDR3L-1333, Max 8GB
Storage	64GB Sata SSD, Up to 512GB, or 500GB HDD
OS	Windows 7, Windows8.1, Windows 10, POS Ready7, Linux
DISPLAY	
Type	15 inch TFT LED Backlight LCD
Resolution	1024x768
Aspect Ratio	4:3
Brightness	300 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4*USB2.0, 1*USB3.0
Serial	2*COM
LAN	1*RJ45, Realtek 8111H Gigabit Ethernet
Cash Drawer	1*RJ11
Audio	1*Line-out
Power DC-IN	DC-IN*1(DIN4)
PHYSICAL&ENVIRONMENTAL	
Operating Temperature	Operating 0~40°
Storage Temperature	Storage-20° -60°
Cooling	Fanless
Dimensions	(W×H×D) 360x340x245 MM
Packing Dimensions	(W×H×D) 450x290x420 MM
Net Weight	5.28KG
Packing Weight	7.00KG
Certification	CE,FCC,RoHS
Color	Black
OPTIONS & PERIPHERALS	
2nd Display	9.7 inch 2nd display with/without touch screen(Optional), Resolution 1024*768
Customer Display	VFD Type20*2 Customer Display(Optional)
Card Reader	MSR, RFID Card Reader(Optional)
Dallas	I-button Reader(Optional)
Biometric Identification	Fingerprint Reader(Optional)
WIFI	Mini PCIe for Wireless LAN(Optional)
Speaker	2W*1 Built-in speaker(Optional)
Wall-mounted	Support VESA 75*75MM or 100*100MM

## DIMENSIONES

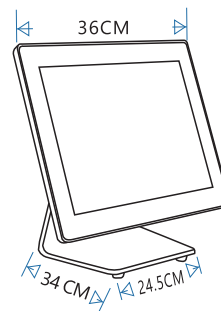

## DESTACANDO



Intel Core i5-4210U,  
3M Cache, 1.8Ghz



5 line full-flat high temperature  
capacitive touch screen



Aluminum alloy base bracket  
Aluminum Die-Casting Back Cover



External secondary screen  
and hard disk installation method



Easy Installation of MSR  
and external USB



Hidden cover for I/O interface



# TITANS TPV




## SPECIFICATIONS

SYSTEM	
Processor	Intel Celeron J1900 Quad-Core, Up to 2.42Ghz Intel Celeron J3455 Quad-Core, Up to 2.30 GHz Intel Celeron J4125 Quad-Core, Up to 2.70 GHz Intel Core i3/i5 3rd, 4th, 5th, 6th, 7th, 8th High Performance CPU
Memory	2GB Standard, DDR3L or DDR4, up to 8GB/16GB/32GB
Storage	mSata or M.2 32GB standard, up to 512GB
OS	Windows 7, 10, 11, POSReady7
DISPLAY	
Type	15/15.6 inch LED Backlight Display
Resolution	1024*768/1366*768(15.6 inch)
Aspect Ratio	4:3/16:9(15.6 inch)
Brightness	250 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	4*USB
LAN	1*RJ45
Display	1*VGA or 1*VGA & 1*HDMI
Serial	2*COM(RS232)
Audio	1*Line Out, 1*Mic In
Power DC-IN	Input AC 100-240V/50-60hz, Output DC 12V/5A
PHYSICAL&ENVIRONMENTAL	
Operating Temperature	Operating 0~50°
Storage Temperature	Storage-20° ~60°
Cooling	Fanless/With CPU Fan
Dimensions	(W×H×D) 360x380x210 MM
Packing Dimensions	(W×H×D) 410x435x260 MM
Net Weight	5.50KG(Single Display)
Packing Weight	7.50KG
Color	Black
OPTIONS & PERIPHERALS	
2nd Display	9.7/12.1/15/15.6 inch 2nd display (Touch on 2nd display Option)
VFD	VFD, 20 Columns x 2 Lines
MSR	ISO 3 Tracks Reading
Wifi	IEEE 802.11 a/b/g/n/ac, 2.4Ghz (5.0Ghz option)
Bluetooth	Bluetooth 4.0 protocol
Speaker	1*4Ω*3W Speaker
Wall Mount	VESA 75*75mm (Available for Single Display Only)

## DIMENSIONES



## DESTACANDO



Intel Celeron & Core Series CPU



Aluminum fuselage design, higher heat conducting efficiency



15/15.6 inch Bezel-Free True-Flat Projective Capacitive



Multiple size choices and easy installation of customer-facing display



Reservation for MSR card reader



Brand new back cover with advanced cable management design



# CLIO TPV




## SPECIFICATIONS

SYSTEM	
Processor	Inte Celeron J1900 (2.0 GHz) Quad-Core Processor, Fanless Inter Core I5-4210U, Dual Core, 3M Cache, 1.8Ghz
Memory	8G Standard, DDR3
Storage	128 SSD standard
OS	Windows 7, windows 8.1, windows 10, POS Ready7
DISPLAY	
Type	15 inch Bezel-Free True-Flat Projective Capacitive Touch Screen
Resolution	1024*768
Brightness	350cd/m2
Touchscreen	Capacitive Touch Screen
INTERFACE	
Display	1*VGA
USB	6*USB
Serial	3*COM
LAN	1*Gigabit Ethernet, RJ45
Audio	1*Line-out
Power DC-IN	Input AC 100-240V/50-60hz, Output DC12V/5A
POWER	
Power Supply	Adaptor 12V,5A
PHYSICAL&ENVIROMENTAL	
Operating Temperature	Operating 0~60°
Storage Temperature	Storage-35° ~75°
Dimensions	(W×H×D) 350×290×300 MM
Packing Dimensions	(W×H×D) 445×290×425 MM
Net Weight	6KG
Packing Weight	7KG
Certification	CE, FCC, RoHS
Color	Black/White
OPTIONS & PERIPHERALS	
2nd Display	15 inch LCD Display, 1366*768, Optional Touch screen
Customer Display	VFD 220 Customer Display
I/O Expansion	1×com(RJ-45 8pins)(Factory Option) 1×cash Drawer Port(Factory Option)
Storage	2.5 inch sata SSD 256GB / sata HDD 500GB
MSR	ISO 1,2,3 Tracks
WIFI	Supported
Wall Mount Kit	VESA-Compatible, 75×75(mm)

## DIMENSIONES



## DESTACANDO



Intel Celeron J1900 Fanless, 2.0Ghz  
Intel Core i5-4210U, 3M Cache, 1.8Ghz



15 inch Bezel-Free True-Flat  
Projective Capacitive Touch Screen



2ND Display



Cable Hidden Bracket



Customer Display VFD220



Hidden Interface



# VENUS TPV




## SPECIFICATIONS

SYSTEM	
Processor	Inte Celeron J1900 (2.0 GHz) Quad-Core Processor, Fanless Inter Core 15-4210U, Dual Core, 3M Cache, 1.8Ghz
Memory	8GB Standard, DDR3
Storage	128GB SSD standard
OS	Windows 7, Windows 8.1, Windows 10, POS Ready7, Linux
DISPLAY	
Type	15"/15.6" Bezel-Free True-Flat Projective Capacitive Touch Screen
Resolution	1024*768/1366*768
Brightness	350cd/m2
Touchscreen	Capacitive Touch Screen
INTERFACE	
Display	1*VGA, 1*HDMI
USB	6*USB (Front 2, rear 4)
LAN	1*Gigabit Ethernet, RJ45
Audio	1*Line-out
Power DC-IN	Input AC 100-240V/50-60hz, Output DC12V/5A
POWER	
Power Supply	Adaptor 12V, 5A
PHYSICAL & ENVIRONMENTAL	
Operating Temperature	Operating 0-60°
Storage Temperature	Storage -35°-75°
Dimensions	(W×H×D) 400×290×300 MM
Packing Dimensions	(W×H×D) 445×400×402 MM
Net Weight	6.0KG
Packing Weight	8.0KG
Certification	CE, FCC, RoHS
Color	Black/White
OPTIONS & PERIPHERALS	
2nd Display	11.6"/12.1"/15"/15.6" LCD Display, Optional Touchscreen
Customer Display	VFD 220 Customer Display
Storage	2.5 inch SSD 128G HDD 500GB
I/O Expansion	1×com(RJ-45 8pins) (Factory Option) 1×cash Drawer Port (Factory Option)
MSR	ISO 1,2,3 Tracks
WIFI	Support
Wall Mount Kit	VESA-Compatible, 75×75(mm)

## DIMENSIONES



## DESTACANDO



Intel Celeron J1900 Fanless, 2.0Ghz  
Intel Core i5-7200U (2.5GHz / 3.1GHz),  
Dual Core, 3M Cache



15/15.6 inch Bezel-Free True-Flat  
Projective Capacitive Touch Screen



2ND Display



Cable Hidden Bracket



Customer Display VFD220



Hidden Interface


# APOLLO TPV




## SPECIFICATIONS

SYSTEM	
Processor	Intel SoC Bay Trail J1900 Quad Core Processor
Memory	2GB Standard, DDR3, (up to 8GB), optional
Storage	Msata SSD 32GB standard, 64GB, 128GB, 256GB, optional
OS	Windows 7, Windows8.1, Windows 10, POS Ready7
DISPLAY	
Type	11.6 inch TFT LED Backlight
Resolution	1366*768
Brightness	220cd/m2
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
Display	1*VGA
USB	5*USB2.0: 1* USB3.0
Serial	2*COM
LAN	1*Gigabit Ethernet, RJ45
Power DC-IN	Input AC 100-240V/50-60hz, Output DC12V/5A
PHYSICAL&ENVIRONMENTAL	
Operating Temperature	Operating 0~60°
Storage Temperature	Storage-35°~75°
Dimensions	(W×H×D) 300x 95x220 MM
Packing Dimensions	(W×H×D) 420x325x170 MM
Net Weight	1.6KG
Packing Weight	2.7KG
Certification	CE,FCC,RoHS
Color	Black/White
OPTIONS & PERIPHERALS	
WIFI	Mini PCIe for Wireless LAN
Speaker	Built-in 3W speaker
Bluetooth	4.0BLE(option)
4G module	Support 4G TD-LTE, FDD-LTE (factory option)
Additional Storage	2.5 inch sata SSD 128GB / HDD 500GB(option)
Bluetooth	Bluetooth 4.0 protocol(option)
Battery	5000mAh(option)
VESA	75*75mm bracket(option)

## DIMENSIONES

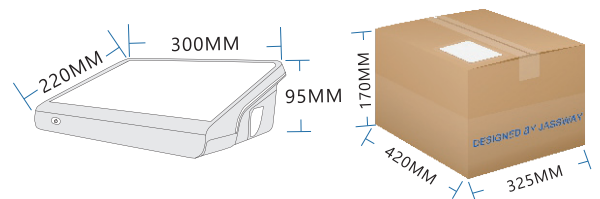

## DESTACANDO



Intel SoC Bay Trail J1900  
Quad Core Processor



11.6 inch TFT LED Backlight  
Projective Capacitive Touch Screen



JAW-8250  
58/80MM Thermal Printer



JAW-6208  
1D/2D Scanner  
617nm LED Aimer, White LED



ODM Service for color line



JAW-400DK  
Bill and Coin Optional  
Automatically Open


# OLIMPIA TPV




## SPECIFICATIONS

SYSTEM	
Processor	Intel Celeron J1900 Quad-Core, Up to 2.42Ghz Intel Celeron J4125 Quad-Core, Up to 2.70 GHz Intel Core i3/i5/i7 3rd, 5th, 6th, 7th, 8th GEN High Performance CPU
Memory	4GB Standard
Storage	64GB SSD
OS	Windows 7, Windows 10 pro, Linux
DISPLAY	
Type	11.6 inch HD Display
Resolution	Standard 1366*768, 1920*1080 Option
Aspect Ratio	16:9
Brightness	250 nits
Touchscreen	Projective Capacitive Touch Screen
PRINTER	
Printer Mechanism	Seiko Thermal Printer Mechanism with Auto Cutter
Interfaces	Standard USB Port, COM Port or Bluetooth Option
Printing Method	Direct Thermal
Printing Speed	200mm/s
Paper Width	79.5±0.5mm
Print Width	72mm
Paper Roll Diameter	60mm
INTERFACE	
USB	5*USB
LAN	1*RJ45
VGA	1*VGA
Cash Drawer	1*RJ11
Serial	1*COM(RS232)
Audio	1*Line Out, 1*Mic In
Power DC-IN	Input AC 100-240V/50-60hz, Output DC 12/7A
PHYSICAL&ENVIRONMENTAL	
Operating Temperature	Operating 0-50°
Storage Temperature	Storage-20°-60°
Dimensions	292x100x297(MM) (W×H×D)
Packing Dimensions	370x380x200(MM) (W×H×D)
Net Weight	2.35KG
Packing Weight	5.20KG
Color	Black/Blue
OPTIONS & PERIPHERALS	
2nd Display	4.3 inch LCD Display Option (Resolution: 800*480)
Customer Display	VFD Customer Display Option, 20 Characters*2 Line
Scanner	Embedded Scanner Option, Support 1D, 2D
Card Reader	NFC Option
Wifi	IEEE 802.11 a/b/g/n/ac Option
Bluetooth	Bluetooth 4.0 protocol Option
Speaker	0.8W Speaker Option
4G module	Support 4G TD-LTE, FDD-LTE (factory option)

## DIMENSIONES

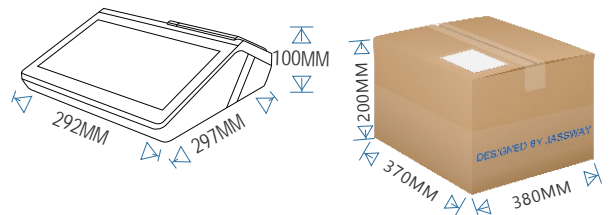

## DESTACANDO



Intel Celeron & Core Series CPU



30 degree main display conforms to human mechanics, and being more friendly to cashier



High-end surface treatment keep fuselage clean at all time



Cooling holes at two sides improve heat dissipation efficiency



Multiple I/O Ports and Peripheral Options



Applicable in more scenarios.


# ALTAS KIOSK




## SPECIFICATIONS

SYSTEM	
Processor	Intel Celeron J1800 Dual-Core, Up to 2.58Ghz Intel Celeron J1900 Quad-Core, Up to 2.42Ghz Intel Celeron J3455 Quad-Core, Up to 2.3Ghz Intel Core i3/i5 3rd, 4th, 5th, 6th, 7th, 8th High Performance CPU
Memory	4GB Standard, DDR3L or DDR4, up to 8GB/16GB/32GB
Storage	64GB standard, up to 512GB
OS	Windows 7, Windows8.1, Windows 10, POS Ready7, Linux
DISPLAY	
Type	21.5 inch TFT LED Backlight
Resolution	1920*1080
Aspect Ratio	16:9
Brightness	250 nits
Touchscreen	Projective Capacitive Touch Screen / Non Touch Display
INTERFACE	
Display	1*VGA or 1*VGA+1*HDMI
USB	3*USB2.0, 1*USB3.0
Serial	2*COM
LAN	1*RJ45
Audio	1*Mic-in, 1*Line-out
Power DC-IN	Input AC 100-240V/50-60hz, Output DC12V/7.5A
PHYSICAL&ENVIRONMENTAL	
Operating Temperature	Operating 0-60°
Storage Temperature	Storage-35° -75°
Cooling	Fanless or with CPU Fan
Dimensions(W×H×D)	Display: 535x325x70(MM) ; Stand: 310x435x310(MM)
Packing Dimensions(W×H×D)	Display: 620x440x230(MM) With Wooden Box; Stand: 490x225x230(MM)
Net Weight	Display: 8.45KG ; Stand: 8.50KG
Packing Weight	Display: 11.50KG With Wooden Box ; Stand: 9.20KG
Certification	CE,FCC,RoHS
Color	Black
OPTIONS & PERIPHERALS	
WIFI	Mini PCIe for Wireless LAN(Optional)
Speaker	Built-in 3W speaker
Bluetooth	Bluetooth 4.0 protocol(option)

## DIMENSIONES

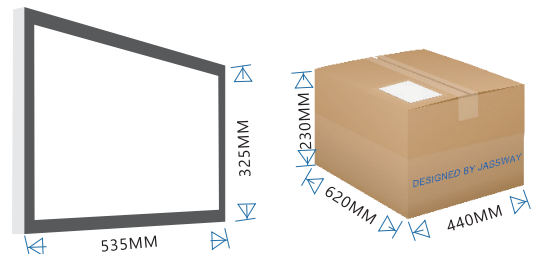

## DESTACANDO



Intel Celeron or Intel Core Series CPU




21.5 inch TFT LED Backlight, 16:9 with 1920\*1080



Floor Stand 1365MM height or Desktop/countertop Stand 548MM height



Ergonomic design, 60° tilted display stand provides comfortable operation and perfect viewing



IP65-rated front weatherproof structure



Place it vertically or horizontally or add a printer or POS machine





# JAW-K320 KIOSK




## SPECIFICATIONS

SYSTEM	
Processor	Intel Celeron J1800 Dual-Core, Up to 2.58Ghz Intel Celeron J1900 Quad-Core, Up to 2.42Ghz Intel Core i3/i5 3rd, 4th, 5th, 6th, 7th, 8th High Performance CPU
Memory	2GB Standard, DDR3L-1600, Max 8GB/16GB
Storage	SSD 32GB standard, up to 512GB, or HDD 500GB
OS	Windows 7, Windows8.1, Windows 10, POS Ready7, Linux
DISPLAY	
Type	32 inch TFT LED Backlight LCD
Resolution	1080*1920
Aspect Ratio	9:16
Brightness	250 nits
Touchscreen	Projective Capacitive Touch Screen
INTERFACE	
USB	2* External USB2.0
LAN	1*Gigabit Ethernet, RJ45
Power DC-IN	Input AC 100-240V/50-60hz, Output DC12V/5A
PHYSICAL&ENVIRONMENTAL	
Operating Temperature	Operating 0~60°
Storage Temperature	Storage-35° ~75°
Cooling	Fanless/CPU Fan
Dimensions	(W×H×D) 1060x533x135 MM
Packing Dimensions	(W×H×D) 1225x695x295 MM
Net Weight	32.8KG
Packing Weight	55.5KG
Certification	CE,FCC,RoHS
Color	Black
OPTIONS & PERIPHERALS	
Printer	Standard 80mm Printer, 58mm Printer Option
Scanner	2D Scanner for Payment or 2D Scanner for Goods Option
Payment Terminal	Reserved Space for Payment Terminal(Size Customizable)
Wifi	Mini PCIe for Wireless LAN(Optional)
Bluetooth	Bluetooth 4.0 protocol(Optional)
Speaker	2*3W Speakers(Optional)

## DIMENSIONES



## DESTACANDO



Intel SoC Bay Trail J1900 Quad Core Processor



32 inch TFT LED Backlight Projective Capacitive Touch Screen



Metal construction



Face camera



Designed with two - channel speakers



Front opening structure & easy maintenance design


# ERATO KIOSK




## SPECIFICATIONS

SYSTEM	
Processor	Intel Celeron J1900 Quad-Core, Up to 2.42Ghz Intel Core i3/i5 3rd, 4th, 5th, 6th, 7th, 8th High Performance CPU
Memory	2GB Standard, DDR3L or DDR4, up to 8GB/16GB/32GB
Storage	32GB standard, up to 512GB
OS	Windows 7, Windows 8.1, Windows 10, POS Ready7, Linux
DISPLAY	
Type	15.8 inch FHD Display
Resolution	1920*1080
Aspect Ratio	16:9
Brightness	250 nits
Touchscreen	Projective Capacitive Touch Screen / Non Touch Display
INTERFACE	
USB	5* External USB2.0
LAN	1*RJ45
Cash Drawer	1*RJ11
Serial	1*COM(RS232)
Parallel	1*DB25
Power DC-IN	Input AC 100-240V/50-60hz, Output DC 12V/7.5A
PHYSICAL&ENVIRONMENTAL	
Operating Temperature	Operating 0~60°
Storage Temperature	Storage-35°~75°
Cooling	Fanless or with CPU Fan
Dimensions(W×H×D)	400x570x247(MM)
Packing Dimensions(W×H×D)	620*440*230(MM) With Wooden Box
Net Weight	7.61KG(Single Display)
Packing Weight	11.50KG With Wooden Box
Certification	CE,FCC,RoHS
Color	White/Grey
OPTIONS & PERIPHERALS	
2nd Display	15.8 inch FHD Display Option (Landscape or Portrait)
Printer	Standard 80mm Printer with Auto Cutter, 58mm Printer Option
Scanner	Support 1D, 2D
Wifi	IEEE 802.11 a/b/g/n/ac
Bluetooth	Bluetooth 4.0 protocol
Speaker	4Ω*3W Speaker
Wall Mount	Support Wall Mount(Only for Single Display)

## DIMENSIONES

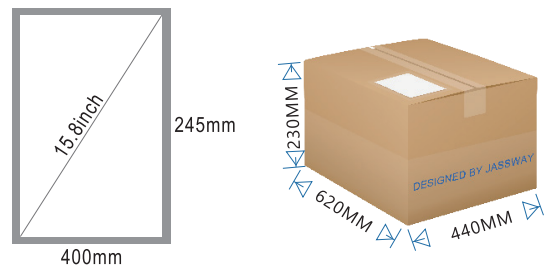

## DESTACANDO



Intel Celeron or Intel Core Series CPU



15.8inch FHD display



2D scanner



58/80mm printer



Main screen with adjustable angle



second display with adjustable angle